



LM-4020-4.0-7.6

1. PART NUMBERING SCHEME

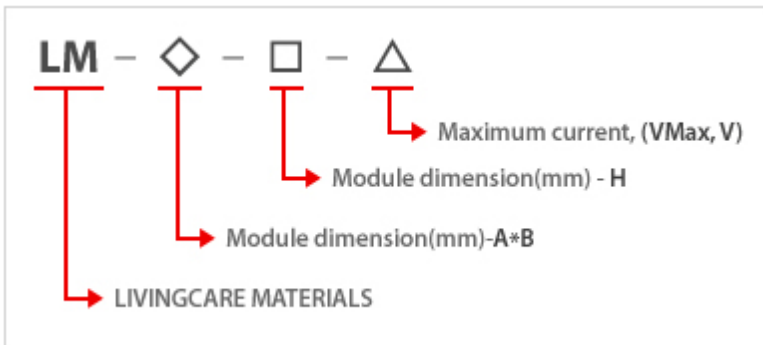

2. GENERAL SPECIFICATION

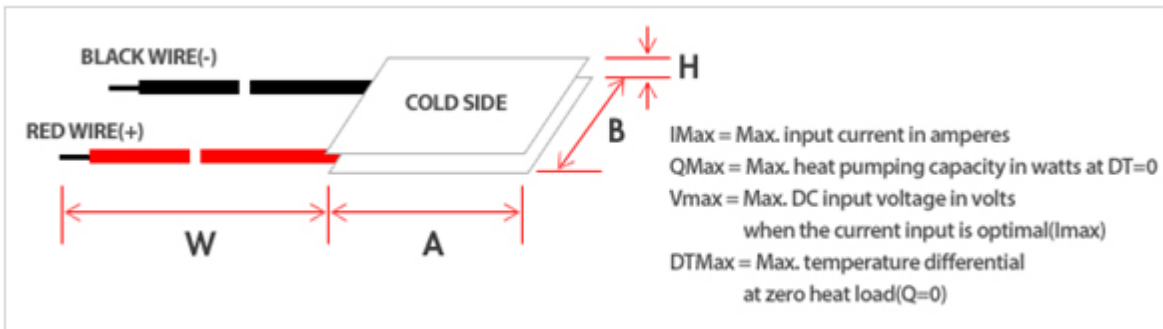

*All specifications are subject to change without notice.

SPEC.	Unit	Value
INTERNAL RESISTANCE	Ω	1.0±10% (at 25°C)
UNFLATNESS AND NONPARALLED NOT MORE THAN	mm	0.05
MELTING POINT TEMPERATURE OF INTERNAL SOLDER	°C	220
CERAMIC TYPE		Al ₂ O ₃ 96%