



## LM-4040-4.0-15.2

### 1. PART NUMBERING SCHEME

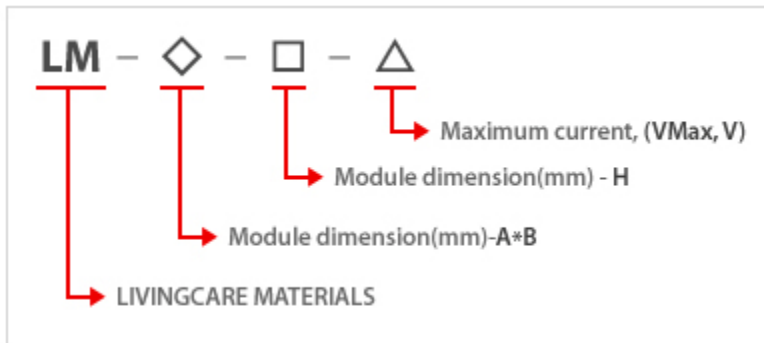

### 2. GENERAL SPECIFICATION

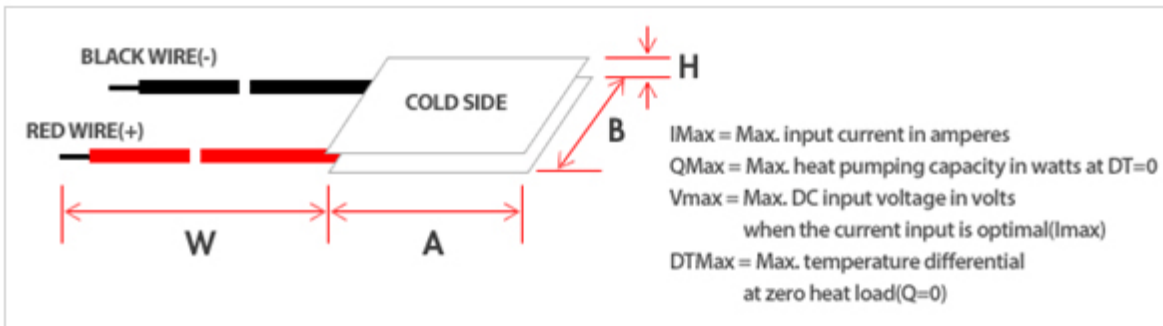

MODEL	I <sub>MAX</sub> (A)	Q <sub>MAX</sub> (W)	V <sub>MAX</sub> (V)	ΔT <sub>MAX</sub> (°C)	DIMENSION		
	Th=27°C				A	B	H
LM-4040-4.0-15.2	5.6	52.9	15.2	70	40±0.5	40±0.5	4.0±0.05
	Th=50°C						
	6.0	59.5	15.2	79			

\*All specifications are subject to change without notice.

---

SPEC.	Unit	Value
INTERNAL RESISTANCE	$\Omega$	2.1±10% (at 25°C)
UNFLATNESS AND NONPARALLED NOT MORE THAN	mm	0.05
MELTING POINT TEMPERATURE OF INTERNAL SOLDER	°C	220
CERAMIC TYPE		Al <sub>2</sub> O <sub>3</sub> 96%

3. PERFORMANCE GRAPH

