

GIGA M and MS

Wireless Portable Voice Amplifiers




Gigaphone Included Kit and Accessories

Wear around neck with included case for wireless microphone



Wear with included headset for hands-free for direct connection or wireless operation

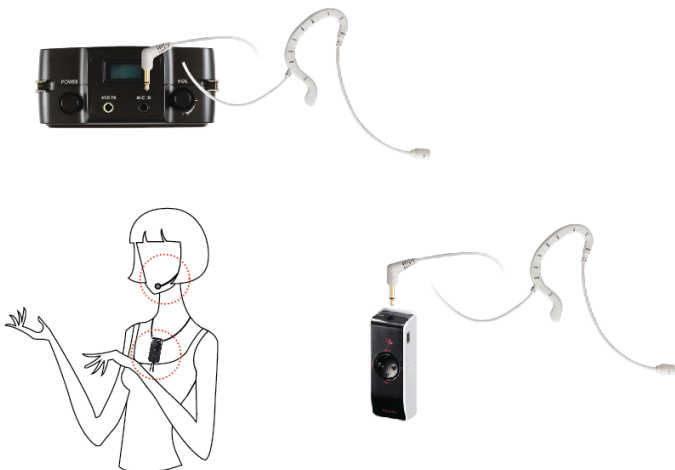

Use wirelessly through additional speakers



Which Gigaphone is right for you?

Model	D-1200	Giga-S	Giga-MS Wireless	Giga-M Wireless
Max Power	20W Megaphone Speaker	30W Megaphone Speaker	30W Megaphone Speaker	20W + 20W (stereo power)
Distortion	5% max (at 15W output)	5% max	5% max	5% max (at 15W output)
SPL	95 dB / W +- 2 dB	95 dB / W +- 2 dB	95 dB / W +- 2 dB	94 dB / W +- 2 dB
Hum and Noise	50 dB Min	50 dB Min	50 dB Min	50 dB Min
AF Response	+2 dB (at 100Hz~12KHz)	+2db (at 260Hz~15KHz)	+2db (at 260Hz~15KHz)	+2db (at 140Hz~15KHz)
Current Consumption	3A Max	3A Max	3A Max	5A Max
Power Source	Li-Polymer 3.7V x 2	Li-Polymer 3.7V x 2	Li-Polymer 3.7V x 2	Li-Polymer 3.7V x 2
Size	87 (W) x 117 (H) x 40 (D) mm	89 (W) x 115 (H) x 40 (D) mm	89 (W) x 115 (H) x 40 (D) mm	113 (W) x 148 (H) x 54 (D) mm
Weight	322g (includes battery 113g)	318g (includes battery 76g)	321g (includes battery 76g)	491g (includes battery 90g)

Still have questions? Do not hesitate to ask for advice and volume pricing.

Call us at:

Phone: 1-416-423-5590

Fax: 1-416-406-6141

Email: info (at) uskoreahotlink.com

