



LM-1530-3.7-7.6

1. PART NUMBERING SCHEME

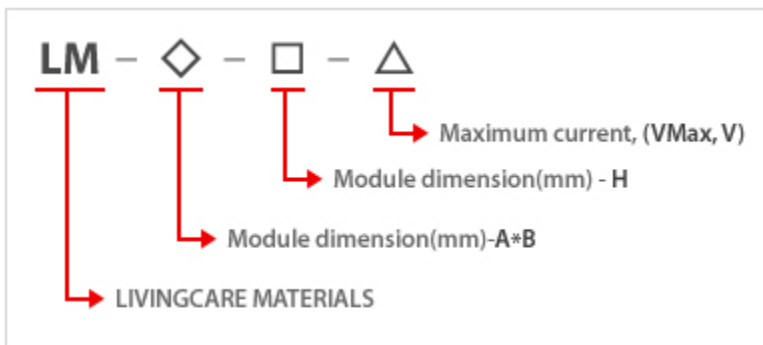

2. GENERAL SPECIFICATION

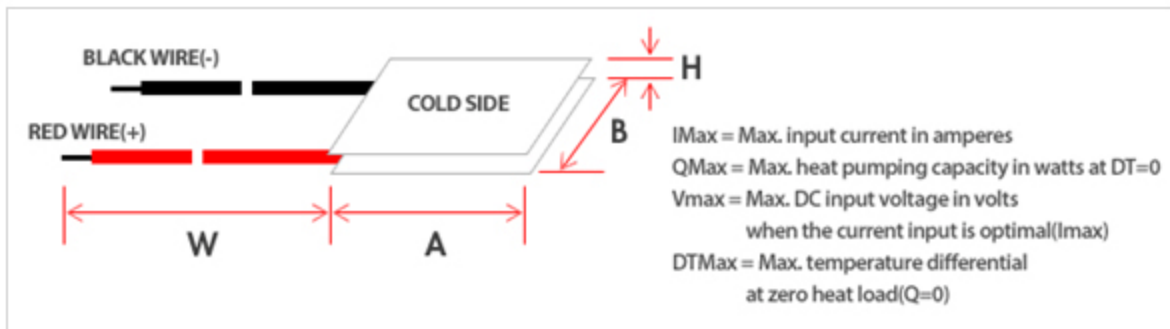

MODEL	$I_{MAX}(A)$	$Q_{MAX}(W)$	$V_{MAX}(V)$	$\Delta T_{MAX}(^{\circ}C)$	DIMENSION		
	$T_h=27^{\circ}C$				A	B	H
LM-1530-3.7-7.6	3.5	16.5	7.6	70	15±0.5	30±0.5	3.7±0.05

*All specifications are subject to change without notice.

SPEC.	Unit	Value
INTERNAL RESISTANCE	Ω	1.6±10%
UNFLATNESS AND NONPARALLED NOT MORE THAN	mm	0.05
MELTING POINT TEMPERATURE OF INTERNAL SOLDER	°C	220
CERAMIC TYPE		Al ₂ O ₃ 96%
Lead wire		Silicone rubber insulated wire (-60~180°C)